

09/29/00  
JC929 U.S. PTO

Frederick P. Fish  
1855-1930

W.K. Richardson  
1859-1951

10-2-00  
**FISH & RICHARDSON P.C.,P.A.**

September 29, 2000

Attorney Docket No.: 10559/230001/P8462

**Box Patent Application**  
Commissioner for Patents  
Washington, DC 20231

3300 Dain Rauscher Plaza  
60 South Sixth Street  
Minneapolis, Minnesota  
55402

Telephone  
612 335-5070

Facsimile  
612 288-9696

Web Site  
www.fr.com

JC916 U.S. PTO  
09/675279  
09/29/00

Presented for filing is a new original patent application of:

Applicant: HONG JIANG

Title: VIDEO PROCESSING

Enclosed are the following papers, including those required to receive a filing date under 37 CFR §1.53(b):

|               | <u>Pages</u>                  |
|---------------|-------------------------------|
| Specification | 23                            |
| Claims        | 10                            |
| Abstract      | 1                             |
| Declaration   | [To be Filed at a Later Date] |
| Drawing(s)    | 8                             |

Enclosures:  
— Postcard.

There are 30 total claims, 12 of which are independent.



BOSTON  
DALLAS  
DELAWARE  
NEW YORK  
SAN DIEGO  
SILICON VALLEY  
TWIN CITIES  
WASHINGTON, DC

09/29/00

**CERTIFICATE OF MAILING BY EXPRESS MAIL**

Express Mail Label No. EL419343048US

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

Date of Deposit September 29, 2000

Signature [Signature]

Vince Defante  
Typed or Printed Name of Person Signing Certificate

FISH & RICHARDSON P.C., P.A.

Commissioner for Patents

September 29, 2000

Page 2

|  |     |
|--|-----|
| Basic filing fee                             | \$0 |
| Total claims in excess of 20 times \$18      | \$0 |
| Independent claims in excess of 3 times \$78 | \$0 |
| Fee for multiple dependent claims            | \$0 |
| Total filing fee:                            | \$  |

Under 37 CFR §1.53(f), no filing fee is being paid at this time.


If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at (612) 335-5070.

Kindly acknowledge receipt of this application by returning the enclosed postcard.

Please send all correspondence to:

SCOTT C. HARRIS  
Fish & Richardson P.C.  
Customer Number: 20985  
4350 La Jolla Village Drive, Suite 500  
San Diego, CA 92122

Respectfully submitted,



Daniel J. Hanson  
Reg. No. 46,757  
Enclosures  
DJH/jaw  
60022902.doc

60022902.doc

APPLICATION  
FOR  
UNITED STATES LETTERS PATENT

TITLE: VIDEO PROCESSING


APPLICANT: HONG JIANG

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL419343048US

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

Date of Deposit September 29, 2000

Signature 

Vince Defante  
Typed or Printed Name of Person Signing Certificate

005260" 64352960

## VIDEO PROCESSING

### BACKGROUND

This invention relates to video processing.

For communication on a limited bandwidth digital channel,  
5 analog video is often encoded into a bitstream and the  
bitstream compressed. Decompression and conversion back to  
analog is done at the receiver end.

A compression technique that partially compensates for  
loss of quality involves separating the video data into two  
bodies of data prior to transmission: a "base" body of data  
and an "enhancement" body of data. The base data include a  
low-quality version of the video sequence, but can be  
transmitted using comparatively little bandwidth.

The enhancement data provide correction to the base data.  
15 Enhancement data may contain information to enhance the color  
of a region of a picture and to enhance the detail of the  
region of a picture. At the receiving end, the base data may  
be recombined with the enhancement data during the decoding  
process. Recombining the base data with all enhancement data  
20 will result in output video of quality very close to the  
original video. Because of communication channel bandwidth  
constraints, however, the full body of enhancement data often  
cannot be transmitted. Consequently enhancement data are

divided into smaller subsets, each of which requires little bandwidth, and one or more subsets of enhancement data may be transmitted at the same time as the base data. Transmitting more enhancement data produces better output video, but requires more bandwidth.

### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1a is a functional block diagram showing a path of a video signal.

Fig. 1b is a diagram showing a path of a video signal.

Fig. 2 is a hierarchical representation of units making up a typical picture.

Figs. 3a and 3b are diagrams depicting organization of DCT coefficients.

Fig. 4 is a block diagram showing video encoding and compression.

Fig. 5 is a block diagram showing video decoding.

Fig. 6 is a flowchart illustrating a threshold-based layering process.

Fig. 7 is a flowchart illustrating selection of a threshold.

Figs. 8a and 8b show an example body of magnitudes of enhancement data coefficients, divided into subsets of bit planes and layers.

Fig. 9 is a flowchart illustrating collection of layers of enhancement data by a decoder.

### DETAILED DESCRIPTION

5           Generally, the techniques described below improve the distribution of video data in a network in which different communication paths are characterized by different bandwidths.

10           Fig. 1a is a block diagram showing a path taken by video data being distributed over a network. Input video signal 10 is fed into an encoder 12, which converts input video signal 10 into video data in the form of a machine-readable series of bits, or bitstream. The video data are then stored on a server 14, pending a request for the video data. When server 14 receives a request for the video data, it sends the data to a transmitter 16, which transmits the data 18 along a communication channel on the network. A receiver 20 receives the data 18 and sends the data as a bitstream to a decoder 22. Decoder 22 converts the received bitstream into an output video signal 24, which may then be viewed.

15  
20           Fig. 1b shows a system for distributing video data. A video source 11 produces input video signal 10, which is input to a first computer 13. First computer 13 includes encoder 12, which encodes the video data in a bitstream 18 for

transmission along communication channel 17 coupled to network 19. First computer 13 also includes memory 15 to store the video data and may function as server 14. A second computer 23, which includes decoder 22, receives bitstream 18 via channel 21. Decoder 22 converts the received bitstream 18 into an output video signal 24, which may then be viewed on a viewer 25.

The encoding done in encoder 12 may involve lossy compression techniques such as MPEG-2 or MPEG-4, version 1 or version 2. (MPEG is short for Motion Picture Experts Group, and MPEG-2 and MPEG-4 represent digital video compression standards and file formats developed by the group.) These techniques result in the creation of a body of base video data, that is, a body of data sufficient to permit generation of a viewable video sequence of lesser quality than is represented by the source video sequence. If the base video data were to be decoded and viewed, the resulting video would be perceived as an inferior version of the original video.

One lossy compression technique employed by MPEG is to encode most of the pictures in the video sequence as changes from one picture to the next (along with motion vectors), rather than as the picture data itself. This technique results in a considerable saving of bandwidth.

Another body of data, called enhancement data, captures the difference between a quantized base video picture and an

original unquantized input video picture. When combined with the base data, the enhancement data improve the quality of the viewable video sequence, resulting in improved video output.

5 A subset of enhancement data may include corrections to a picture, or corrections to the change from one picture to the next. In general, enhancement data correspond to the base data, i.e., if the base data encode the changes from one picture to the next, then the enhancement data corresponding to the base data includes a correction to the change from one picture to the next. Enhancement data may also be used during decoding 22 to reconstruct pictures that have been removed from the encoded base video data during encoding 12.

10 In many circumstances, the communication channel 16 has limited bandwidth, and can accommodate some, but not all, of the enhancement data. When receiver 20 and decoder 22 receive less than the full amount of enhancement data, output video 24 is less than fully corrected. The techniques described below utilize the bandwidth efficiently, delivering greater enhancement for a given bandwidth, by creating subsets or "layers" of enhancement data by a threshold-based process to be described below.

15 Fig. 2 shows some units that form a picture. In general, a picture is made up of picture elements, or pixels. An 8-by-8 square of pixels forms a block 30, and a 2-by-2 square of blocks forms a macroblock 32. Macroblocks placed side-by-side

may form a slice 34 of picture data. A slice is a horizontal strip of the picture or several adjacent strips in raster scanning order. A sequence of slices may compose a picture 36. For purposes of illustration, the process of encoding will be demonstrated by looking at an 8-by-8 block of video data 30. Actual processing may take place using units of data other than an 8-by-8 blocks, such as a macroblock 32.

During the encoding process, the picture data may undergo a transformation process as a part of data compression. A widely-used transform is the discrete cosine transform (DCT). The DCT is a linear transform similar to the discrete Fourier transform in that the transformed data are ordered by frequency and are weighted by coefficients. An 8-by-8 block of pixels undergoing a DCT will generate an 8-by-8 matrix of coefficients. The DCT may operate on groups of pixels of other sizes as well, such as a 16-by-16 block, but the transform of an 8-by-8 block is an exemplary application of the DCT. In general, the DCT treats each 8-by-8 block of pixels as a discrete signal. The DCT creates an 8-by-8 matrix of coefficients representing the horizontal frequency and the vertical frequency of the pixels.

Fig. 3a illustrates how a DCT arranges the coefficients in an 8-by-8 matrix 40. The horizontal coefficients are ordered with the lower-frequency terms on the left and the higher-frequency terms on the right. The vertical

coefficients are ordered with the lower-frequency terms on the top and the higher-frequency terms on the bottom. The coefficient stored in the uppermost leftmost cell 42 represents the portion of the 8-by-8 block of pixels that has zero horizontal frequency and zero vertical frequency, the portion that is constant throughout the block. This coefficient, which is often called the "DC coefficient," may represent the average color and brightness of the entire block of pixels. The coefficient stored in lowermost rightmost cell 44 represents the highest amount of horizontal and vertical change within the block.

The coefficients within matrix 40 can be integers of any arbitrary range. Frequently the coefficients are stored as a magnitude, consisting of a set of bits, and a sign (positive or negative), consisting of a single bit.

As illustrated in Fig. 3b, matrix 40 may be visualized as a three-dimensional array of binary coefficients, with each cell of the array occupied by a '1' bit or a '0' bit. The uppermost plane of bits, or "bit plane" 46, represents the most significant bits. The next highest plane 48 represents the next most significant bits, and so on. The lowermost plane 50 represents the least significant bits. The array shown in Fig. 3b represents an 8-by-8 matrix of coefficients, with each coefficient consisting of eight bits. Thus, each coefficient can represent an integer from 0 to 255 ( $2^8 - 1$ ).

More or fewer than eight bits can be used to represent the coefficients.

5 The encoding process generates a matrix of coefficients of enhancement data, which can be further divided into a plurality of bit planes for transmission. As will be discussed below, dividing the enhancement data into bit planes is inefficient and inflexible. A threshold-based layering process introduced below offers a more flexible and efficient way of dividing the enhancement data.

10 Fig. 4 shows a block diagram of an exemplary encoder 12. Encoder 12 may be implemented as software, which may be stored in a machine or computer system on any machine-readable medium such as a magnetic disk or optical drive, or may be stored within non-volatile memory such as read-only memory (ROM).  
15 Fig. 4 demonstrates encoding and compression of a series of input pictures 60, resulting in a base data bitstream of video data 62 plus a bitstream of enhancement data 64. Base data bitstream 62 and enhancement data bitstream 64 may be combined into a single output bitstream (not shown) by a multiplexer  
20 (not shown), prior to storage on a server or transmission along a communication channel.

25 The base data may be created by standard video encoding and compression 66. The encoding and compression components 66 shown in Fig. 4 are illustrative but are not the only way to achieve encoding and compression. Encoding and compression

may employ a DCT 68, quantization 70, scanning 72 and variable length coding 74. Creation of base data 62 is a lossy process, with most of the loss occurring during quantization 70. Fig. 4 also includes components to encode the changes between individual pictures, including inverse quantization 76, an inverse discrete cosine transform (IDCT) 78, motion compensation 80, frame store 82, motion estimation 84, and subtraction 86 of an earlier picture 88 from input picture stream 60 to isolate the changes from one picture to the next.

Fig. 4 shows a subtraction 90 that results in the creation of enhancement data. The enhancement data undergo processing 98 separate from the base data. The enhancement data consist of the difference between the unquantized base video data and the unquantized input video. In Fig. 4, the enhancement data corresponding to each picture represent enhancements to the changes between individual pictures, as well as enhancements to the individual pictures themselves.

The enhancement data can undergo optional pre-processing 92. Pre-processing may include, for example, emphasizing the visually important components in the enhancement data and deemphasizing the visually insignificant components. In general, people watching a video generally tend to focus upon the overall appearance of the pictures, rather than upon the details of the pictures. Information related to the overall appearance, which is more visually significant, tends to be

concentrated in the lower-frequency DCT terms shown in Fig. 3. Information related to details of the picture, which is less visually significant, tends to be concentrated in the higher-frequency DCT terms. Pre-processing can be used to emphasize the visually significant data, giving it higher transmission priority.

The enhancement data undergo a threshold-based layering process 94, described in more detail below. Iterative application 100 of threshold-based layering process 94 creates multiple layers of enhancement data. The layers are scanned 95 and coded by a variable length coder 96, resulting in an enhancement data bitstream 64.

Base data bitstream 62 and enhancement data bitstream 64 may be stored on a server awaiting a client's request for the video sequence or broadcast to the network. When the video data are transmitted over communication channel 17, base data 62 are transmitted, typically with layers of enhancement data.

Fig. 5 shows a block diagram of an exemplary decoder 22. Decoder 22, like encoder 12, may be implemented as software. Fig. 5 demonstrates a method for decoding and recovery of video data that has been transmitted by a server 14 over a communication channel 17 and received 20 by a client. Decoder 22 shown in Fig. 5 illustrates one way to decode the video data but not the only way to decode the data. Some of the operations depicted in Fig. 5 are linear, and may appear in a

different order. For example, Fig. 5 depicts enhancement data as recombined with base data after IDCT operations 114, 132. With this technique, a base data value corresponds to a picture unit such as a pixel, and the enhancement data represent corrections to the picture unit. Because the discrete cosine transform is linear, however, enhancement data can be recombined with base data before IDCT operations 114, 132. In the latter case, the base data values represent DCT coefficients, and the enhancement data represent corrections to the coefficients. Furthermore, decoding may include additional operations that do not appear in Fig. 5.

The input to decoder 22 includes a bitstream of video data (not shown), which may be separated into a bitstream of base data 62 and a bitstream of enhancement data 102. A demultiplexer (not shown) may be used to separate the bitstreams. Base data bitstream 62 shown in Fig. 5 is the same as bitstream 62 shown in Fig. 4. Enhancement data bitstream 102 shown in Fig. 5, however, is not necessarily the same as enhancement data bitstream 64 shown in Fig. 4. Because of limitations in channel bandwidth, less than the full amount of enhancement data might be transmitted on the channel.

The base data and the enhancement data are subjected to different decoding processes, or "pipelines" 104, 106. Just as the encoding of base data and enhancement data may not have

involved identical steps, there may be some differences in the decoding processes as well.

In base data decoding pipeline 104, the base data undergoes variable length decoding 108, an inverse scan 110, an inverse quantization 112, and an IDCT 114. Variable length decoding 108, inverse scan 110, inverse quantization 112 and IDCT 114 operations essentially undo variable length coding 74, scanning 72, quantization 70 and DCT 68 operations performed during encoding shown in Fig. 4. Decoded base data may then be processed in a motion compensator 116, which may reconstruct individual pictures based upon the changes from one picture to the next. Data from a previous, or "reference" picture 118 may be stored in a temporary memory unit called a "frame buffer" 120 and may be used as a reference. Decoded data from IDCT 114 is used by motion compensator 116 to determine how the next picture in the sequence changes from the previous picture. IDCT 114 may result in the creation of invalid video data, such as number out of range. A "clip" function 115 makes the data valid by setting the datum to the nearest in-range number. The output of the base data pipeline 104 is decoded base video data 122. The base data decoding techniques shown in Fig. 5 are illustrative but are not the only way to achieve decoding.

Decoding pipeline for enhancement data 106 is different from decoding pipeline for base data 104. The enhancement

data undergo a variable length decoding process 124 and an  
inverse scan process 126, which undo variable length coding 96  
and scanning 95 performed by encoder 12. The data then  
undergo collection 128 and post-processing 130. Collection  
128, which will be described in more detail below, combines  
the layers of enhancement data produced by threshold-based  
layering process 94. Post-processing 130 undoes pre-  
processing 92 performed by encoder 12. The output from the  
IDCT 132 represents a correction, which is summed 134 with the  
base data and clipped 135, resulting in enhanced viewable  
video data 136.

As noted above, bandwidth constraints often prevent  
transmission of the full body of enhancement data. Where  
bandwidth constraints exist, it is desirable to transmit  
subsets of the enhancement data that produce the best output  
video quality. One way to select subsets of enhancement data  
is to transmit the enhancement data bit plane by bit plane.  
Server 14 transmits most significant bit plane 46 first,  
followed by the bit plane containing the next most significant  
bits 48. Server 14 continues to transmit as many bit planes  
as the bandwidth can accommodate. Most significant bit plane  
46 receives the highest transmission priority, bit plane 48  
with the next most significant bits receives the next highest  
transmission priority, and so on. Because of bandwidth

limitations, bit planes containing less significant bits might not be transmitted at all.

Bit plane by bit plane transmission of enhancement data is inefficient for several reasons. First, most corrections to the base data tend to be relatively small corrections. As a result, most of the numbers in a block 40 of enhancement data tend to be small numbers, and therefore most significant bit plane 46 usually contains a high percentage of '0' bits. Similarly, next most significant bit plane 48 is likely to consist of a high percentage of '0' bits, although typically the percentage is not as high as in most significant bit plane 46. Transmitting only two bit planes of enhancement data, therefore, will generally result in an unsatisfying correction to the base data, because most of the enhancement bits are '0' bits. As a result, transmitting enhancement data bit plane by bit plane will not result in improved picture quality proportional to bandwidth. Cutting the available bandwidth by half, for example, will usually result in cutting the picture correction quality by more than half.

Second, each bit plane undergoing variable length coding consumes unequal amounts of bandwidth. Typically most significant bit plane 46 needs the least bandwidth and least significant bit plane 50 needs the most bandwidth. Generally speaking, each bit plane consumes more bandwidth than the bit plane above it. If enhancement data are transmitted bit plane

by bit plane, each transmitted bit plane will consume a larger amount of bandwidth than the bit plane previously transmitted. At some point the bandwidth cannot accommodate an entire new bit plane, so only part of a bit plane can be transmitted. As  
5 a result, only part of a picture 36 receives the enhancement of the bit plane, and the rest of the picture does not. The entire picture 36 is not enhanced equally.

Third, bit plane by bit plane transmission is inflexible and does not allow for adjustment due to the quality of the enhancement data.  
10

The techniques described herein provide a more efficient use of available bandwidth by employing a threshold-based layering process 94. Threshold-based layering process 94 provides for improvement to the picture as a whole, by  
15 flexibly dividing the enhancement data into layers, rather than rigidly into bit planes. Partitioning the enhancement data into bit planes takes no account of the characteristics of the enhancement data. Dividing the enhancement data into layers, by contrast, allows the enhancement data to be  
20 partitioned depending upon the characteristics of the enhancement data. Threshold-based layering process 94 thus permits encoder 12 to adjust the encoding process to the enhancement data. An advantage of threshold-based layering is that it can usually produce a plurality of layers consuming  
25 approximately equal amounts of bandwidth, thereby more closely

relating the quality of the received picture to the available bandwidth.

5 The process of creation of enhancement layers is depicted in Fig. 6. The process begins with a body of enhancement data (140) entering threshold-based layering process 94. A determination is made whether layers of enhancement data need to be created (142) and if not, threshold-based layering process 94 is concluded (144). There are many conditions that could terminate the layering process. For example, if the enhancement data consist entirely of '0' bits, then there are no more data to be processed, and the layering process 94 terminates. Other terminating conditions can be whether process 94 has produced a predetermined number of layers, or whether all available bandwidth has been exhausted. Encoder 12 may also be allowed to determine the number of layers to be generated.

10 As will be explained in more detail below, creating a layer of enhancement data includes selecting a threshold value (146). On the basis of this threshold value, a layer of enhancement data (148) consisting of '1' bits and '0' bits is generated. The layer of enhancement data includes a '1' bit for all magnitudes greater than or equal to the threshold value, and a '0' bit for all magnitudes less than the threshold value. By selection of the threshold value, a layer may contain more, fewer, or an equal number of '1' bits than

would be contained in a bit plane. The threshold can be selected to regulate the number of '1' bits in a layer, or to regulate the distribution of '1' bits within a layer, or to control the bandwidth consumed by a layer, or any combination thereof. The threshold value is subtracted from the magnitude of the enhancement data (150), but only from those magnitudes equal to or in excess of the threshold so that no negative magnitudes are created.

Once the layer is created, the layer may be included (152) in the enhancement data bitstream 64. The layer typically includes a header that stores the value of the chosen threshold. The threshold value in the header can be used by decoder 22 to decode the enhancement data. In addition to the threshold value and the layer of data, the sign values may be sent as well. Although there are many ways to transmit sign value data, generally speaking it is more efficient to transmit sign values only for coefficients actually included in the enhanced data bitstream, and to transmit a coefficient's sign value only once. The layering process may then be repeated (154) to create additional layers with different threshold values. It is possible that the same threshold value may be used repeatedly to create layers, and it is also possible that a later threshold value may have a higher value than an earlier threshold value.

There are many ways to select a threshold level based upon the characteristics of the enhancement data. One of the ways to set a threshold level is shown in Fig. 7. The enhancement data (160) are evaluated by counting the frequencies of the coefficient magnitudes (162). A statistical analysis, such as the preparation of a histogram (164), is used to evaluate the distribution of the coefficients. Based upon the distribution shown by the statistical analysis (164), a threshold is selected to divide the enhancement data into layers (166). Ways to partition the enhancement data include selecting a target number of '1' bits for the enhancement layer, creating a layer to fit within a desired bandwidth, creating a layer to produce a desired enhancement quality, creating a layer depending upon other characteristics of the enhancement data, or any combination thereof. A technique illustrated below involves selection of threshold values to produce a plurality of layers, each layer containing approximately a target number of '1' bits.

Figs. 8A and 8B use an exemplary block of coefficient magnitudes (190) for a small picture to compare generation of five layers of enhancement data (200, 202, 204, 206, 208) to generation of three bit planes (192, 194, 196). Figs. 8A and 8B also illustrate one of many techniques for selection of threshold values. Beginning with an exemplary block of coefficient magnitudes (190), it can be determined that the

largest value in the block is 120 (which is, in this example, the magnitude of the DC coefficient), or the seven-bit binary number '1111000'. Because the largest value in the block (190) can be expressed with seven bits, the block as a whole can be expressed in seven bit planes. The most significant bit plane (192) includes fourteen '1' bits. The second most significant bit plane (194) includes twenty-one '1' bits. The third most significant bit plane (196) includes twenty-six '1' bits, almost twice as many as the most significant bit plane (192). Because the number of '1' bits increases with each successive bit plane, each bit plane consumes more bandwidth than the bit plane before it.

In contrast to the three bit planes (192, 194, 196) in Fig. 8A, Fig. 8B shows five layers of enhancement data (200, 202, 204, 206, 208), each layer targeted to include approximately ten '1' bits. The first enhancement layer (200) was created by the selection of a first threshold value of 71. The resulting first layer of enhancement data (200) includes a '1' bit for all coefficient magnitudes greater than or equal to the first threshold value of 71, and a '0' bit for all magnitudes less than the threshold value. Selection of a first threshold value of 71 results in first layer (200) which includes ten '1' bits.

The first threshold value of 71 is then subtracted from all of the magnitudes that are greater than or equal to the

threshold value (150) and a second layer (202) can be generated. The second selected threshold value is 49, which results in a second layer of enhancement data (202). Like the first layer, the second layer includes ten '1' bits.

5 The process then repeats to create the third layer (204), which uses a third threshold value of 33. Once again, the third layer (204) includes ten '1' bits. A fourth layer (206) created with a fourth threshold of 25 likewise includes ten '1' bits, as does a fifth layer (208) created with a fifth threshold of 19.

10 Thus, by selection threshold values, five layers of enhancement data (200, 202, 204, 206, 208) can be generated, each having ten '1' bits, and each layer consuming approximately the same bandwidth. In practice not all layers are likely to have exactly the target number of '1' bits, but  
15 by selection of threshold values based upon the distribution of the data, it is frequently possible to generate several layers that are close to each other in the number of '1' bits per layer. Moreover, although partitioning the enhancement data into layers of equal bandwidth may be desirable, the  
20 layers may also be of unequal bandwidth.

The available bandwidth may also play a role in determining the threshold values. If, for example, the total available bandwidth would accommodate about fifty '1' bits per  
25 unit of time, then using thresholds to divide the enhancement

data into layers has advantages over dividing the enhancement data into bit planes. The threshold-based layering process includes the flexibility to generate five complete layers of enhancement data (200, 202, 204, 206, 208), each layer  
5 improving the entire picture and all layers capable of being carried within the available bandwidth. That same bandwidth could not, however, accommodate the first three bit planes (192, 194, 196), which include more '1' bits per unit time that the available bandwidth can accommodate. If the total  
10 available bandwidth would accommodate a different number of '1' bits, thresholds could be selected to produce layers capable of being carried within that bandwidth.

Threshold selection may also take into account whether the enhancement data are to be transmitted over two channels of differing bandwidth. If, for example, a first channel  
15 would accommodate about fifty '1' bits per unit of time, and a second channel would accommodate about thirty '1' bits per unit of time, then five complete layers (200, 202, 204, 206, 208) could be transmitted over the first channel and three  
20 complete layers (200, 202, 204) could be transmitted over the second channel.

Threshold selection may also be based upon other factors other than or in addition to bandwidth, such as the desired amount of improvement per layer.

After the layers and their corresponding threshold values are received by decoder 22, decoder 22 undoes the layering process by collecting 128 the layers. A process for collecting is illustrated in Fig. 9. At the beginning of the collection process, enhancement data for a particular unit of video data, such as a block 30, is received (210). The enhancement data typically consist of a plurality of layers. The layers of enhancement data are collected and may be held in a buffer, which will hold the magnitudes of the correction coefficients. Typically the correction coefficients in the buffer are initialized to zero (212). If a layer of enhancement data is present (214), the threshold value used to generate that layer is recovered, for example, the threshold is retrieved from the layer header (216). The threshold value is then added to each correction coefficient in the buffer for each '1' bit in the layer (218). For each '0' bit, nothing is added to the corresponding correction coefficient in the buffer. The process repeats (220) as long as there are additional layers. With each additional layer, the data in the buffer approaches the value of the data that underwent the threshold process 94 in encoder 12. When all layers have been collected, and the data in the buffer represent the collected enhancement data 102 received by decoder 22, which is usually only an approximation of the full body of enhancement data. The data are assigned the appropriate sign value (222, 224).

The data may also undergo an optional truncation adjustment (226). Truncation inaccuracies occur for non-zero magnitudes that fall below the lowest threshold value and are too small to be transmitted. These magnitudes are represented in the buffer as zeroes. Truncation adjustment adds a small amount of "noise" to replace the zeros. The noise may simply consist of adding a constant value, such as a number approximately one-quarter of the lowest threshold value, to all zeros in the buffer. Another option is to replace the zero values with random integer values smaller than the lowest threshold value. Following truncation adjustment (226), the collection process is then concluded (228) and the enhancement data may be further processed and combined with base data as shown in Fig. 5.

Various embodiments of the invention have been described. These and other embodiments are within the scope of the following claims.

What is claimed is:

1 1. A method comprising:

2 forming layers of digital video enhancement data to  
3 achieve bandwidth requirements for the respective layers.

1 2. The method of claim 1 wherein forming a layer of video  
2 enhancement data further comprises:

3 selecting a threshold value based upon the bandwidth  
4 requirements; and

5 generating a layer of video enhancement data based upon  
6 the threshold value.

1 3. The method of claim 2 further comprising:

2 transmitting the layer of video enhancement data over a  
3 digital communication channel; and

4 transmitting the threshold value over the digital  
5 communication channel.

1 4. An article comprising a computer-readable medium which  
2 stores computer-executable instructions for video data  
3 processing, the instructions causing a machine to:

4 form layers of digital video enhancement data to achieve  
5 bandwidth requirements for the respective layers.

1        5.    The article of claim 4 wherein forming a layer of video  
2        enhancement data further comprises:

3            selecting a threshold value based upon the bandwidth  
4        requirements; and

5            generating a layer of video enhancement data based upon  
6        the threshold value.

1        6.    The article of claim 5, the instructions further causing  
2        the machine to:

3            transmit the layer of video enhancement data over a  
4        digital communication channel; and

5            transmit the threshold value over the digital  
6        communication channel.

1        7.    A method comprising:

2            processing layers of digital video enhancement data to  
3        enhance a base video signal, the layers having bandwidth  
4        requirements.

1        8.    The method of claim 7 wherein the layers have  
2        approximately equal bandwidth requirements.

1        9.    The method of claim 7 wherein the base video signal  
2        comprises a picture, and wherein each processed layer enhances  
3        the entire picture.

1 10. An article comprising a computer-readable medium which  
2 stores computer-executable instructions for video data  
3 processing, the instructions causing a machine to:

4 process layers of digital video enhancement data to  
5 enhance a base video signal, the layers having bandwidth  
6 requirements.

1 11. The article of claim 10 wherein the layers have  
2 approximately equal bandwidth requirements.

1 12. The article of claim 10 wherein the base video signal  
2 comprises a picture, and wherein each processed layer enhances  
3 the entire picture.

1 13. A method comprising:

2 receiving a layer of digital video enhancement data that  
3 achieves a bandwidth requirement, and

4 transmitting the layer over a digital communication  
5 channel.

1 14. The method of claim 13, wherein the layer of digital  
2 video enhancement data is a first layer of digital video  
3 enhancement data that achieves a first bandwidth requirement,  
4 the method further comprising:

receiving a second layer of digital video enhancement data that achieves a second bandwidth requirement, wherein the first bandwidth requirement is not equal to the second bandwidth requirement, and

transmitting the second layer over the digital communication channel.

15. The method of claim 13 further comprising:

receiving a threshold value corresponding to the layer, wherein the layer comprises a '1' bit for each magnitude greater than or equal to the threshold value; and

transmitting the threshold value over the digital communication channel.

16. An article comprising a computer-readable medium which stores computer-executable instructions for video data processing, the instructions causing a machine to:

receive a layer of digital video enhancement data that achieves a bandwidth requirement, and

transmit the layer over a digital communication channel.

17. The article of claim 16, wherein the layer of digital video enhancement data is a first layer of digital video enhancement data that achieves a first bandwidth requirement, the instructions further causing a machine to:

5 receive a second layer of digital video enhancement data  
6 that achieves a second bandwidth requirement, wherein the  
7 first bandwidth requirement is not equal to the second  
8 bandwidth requirement, and

9 transmit the second layer over the digital communication  
10 channel.

1 18. The article of claim 16, the instructions further causing  
2 a machine to:

3 receive a threshold value corresponding to the layer,  
4 wherein the layer comprises a '1' bit for each magnitude  
5 greater than or equal to the threshold value; and

6 transmit the threshold value over the digital  
7 communication channel.

1 19. A method comprising:

2 generating from a source video sequence a digital base  
3 video signal;

4 generating from the source video sequence a body of  
5 digital video enhancement data; and

6 generating from the body of digital video enhancement  
7 data a layer of digital video enhancement data, the layer  
8 achieving a bandwidth requirement.

1 20. The method of claim 19, wherein the body of digital video  
2 enhancement data includes a plurality of magnitudes, and  
3 wherein generating a layer of digital video enhancement data  
4 comprises:

5 selecting a threshold value; and  
6 forming a layer of digital video enhancement data  
7 comprising a '1' bit for each magnitude greater than or equal  
8 to the threshold value.

1 21. An article comprising a computer-readable medium which  
2 stores computer-executable instructions for video data  
3 processing, the instructions causing a machine to:

4 generate from a source video sequence a digital base  
5 video signal;

6 generate from the source video sequence a body of digital  
7 video enhancement data; and

8 generate from the body of digital video enhancement data  
9 a layer of digital video enhancement data, the layer achieving  
10 a bandwidth requirement.

1 22. The article method of claim 21, wherein the body of  
2 digital video enhancement data includes a plurality of  
3 magnitudes, and wherein generating a layer of digital video  
4 enhancement data comprises:

5 selecting a threshold value; and

6 forming a layer of digital video enhancement data  
7 comprising a '1' bit for each magnitude greater than or equal  
8 to the threshold value.

1 23. A method comprising:

2 receiving a digital base video signal comprising a set of  
3 values;

4 receiving a layer of digital video enhancement data  
5 comprising a set of bits, each bit corresponding to a value of  
6 the digital base video signal;

7 receiving a threshold value;

8 for each '1' bit in the layer of digital video  
9 enhancement data, combining the threshold value with the  
10 corresponding value of the digital base video signal.

1 24. The method of claim 23 further comprising:

2 receiving a sign bit corresponding to a bit in the layer  
3 of digital video enhancement data,

4 wherein combining the threshold value with the  
5 corresponding value of the digital base video signal comprises  
6 combining by adding when the sign bit indicates positive and  
7 combining by subtracting when the sign bit indicates negative.

1 25. An article comprising a computer-readable medium which  
2 stores computer-executable instructions for video data  
3 processing, the instructions causing a machine to:

4 receive a digital base video signal comprising a set of  
5 values;

6 receive a layer of digital video enhancement data  
7 comprising a set of bits, each bit corresponding to a value of  
8 the digital base video signal;

9 receive a threshold value;

10 for each '1' bit in the layer of digital video  
11 enhancement data, combine the threshold value with the  
12 corresponding value of the digital base video signal.

1 26. The article of claim 25, the instructions further causing  
2 the machine to:

3 receive a sign bit corresponding to a bit in the layer of  
4 digital video enhancement data,

5 wherein combining the threshold value with the  
6 corresponding value of the digital base video signal comprises  
7 combining by adding when the sign bit indicates positive and  
8 combining by subtracting when the sign bit indicates negative.

1 27. A system comprising

2 an encoder configured to:

3           generate from a source video sequence a digital base  
4           video signal;

5           generate from the source video sequence a body of  
6           digital video enhancement data; and

7           generate from the body of digital video enhancement  
8           data a layer of digital video enhancement data, the layer  
9           achieving a bandwidth requirement.

1           28. The system of claim 27, wherein the encoder is further  
2           configured to:

3           select a threshold value based upon the bandwidth  
4           requirement; and

5           generate a layer of digital video enhancement data based  
6           upon the threshold value.

1           29. A system comprising

2           a decoder configured to:

3           receive a digital base video signal comprising a set  
4           of values;

5           receive a layer of digital video enhancement data  
6           comprising a set of bits, each bit corresponding to a  
7           value of the digital base video signal;

8           receive a threshold value;

9                   for each '1' bit in the layer of digital video  
10                   enhancement data, combine the threshold value with the  
11                   corresponding value of the digital base video signal.

1       30. The system of claim 29 wherein the combination generates  
2       an enhanced viewable video signal.

## VIDEO PROCESSING

### ABSTRACT OF THE DISCLOSURE

In an encoding process, video data are represented as a  
bitstream of quantized base data and enhancement data, which  
5 capture the difference between a quantized base video picture  
and an original unquantized input video picture. Due to  
bandwidth constraints on a communication channel, it may be  
unfeasible to transmit all enhancement data. During the  
encoding process, the enhancement data may be divided into  
10 "layers" based upon bandwidth restrictions. Following  
transmission, the layers are recombined and are added to the  
base data by a decoder, producing a viewable video sequence.

60022467.doc

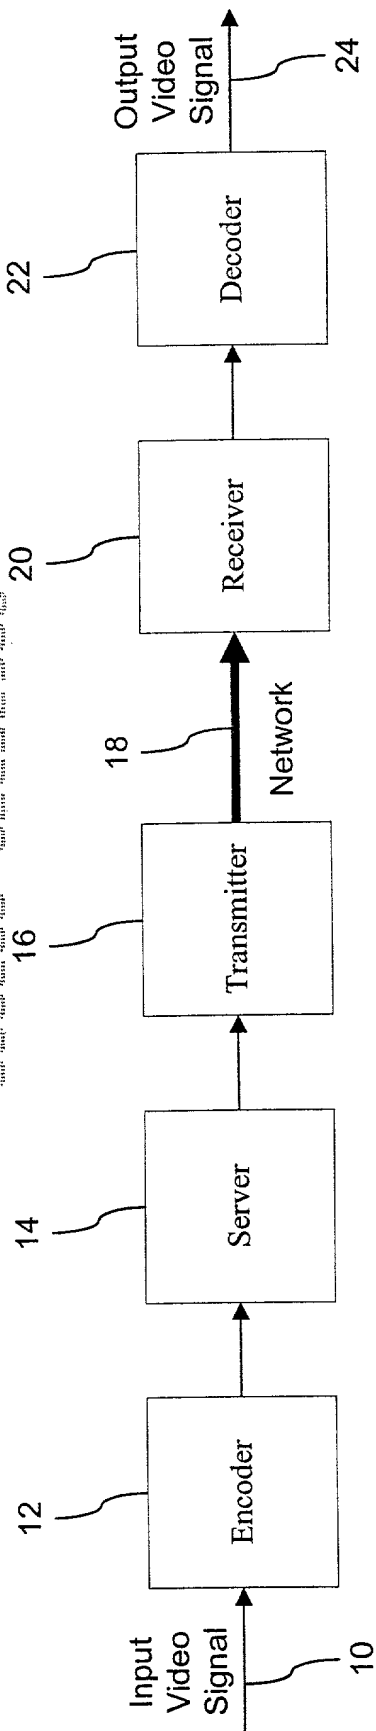


Fig. 1a

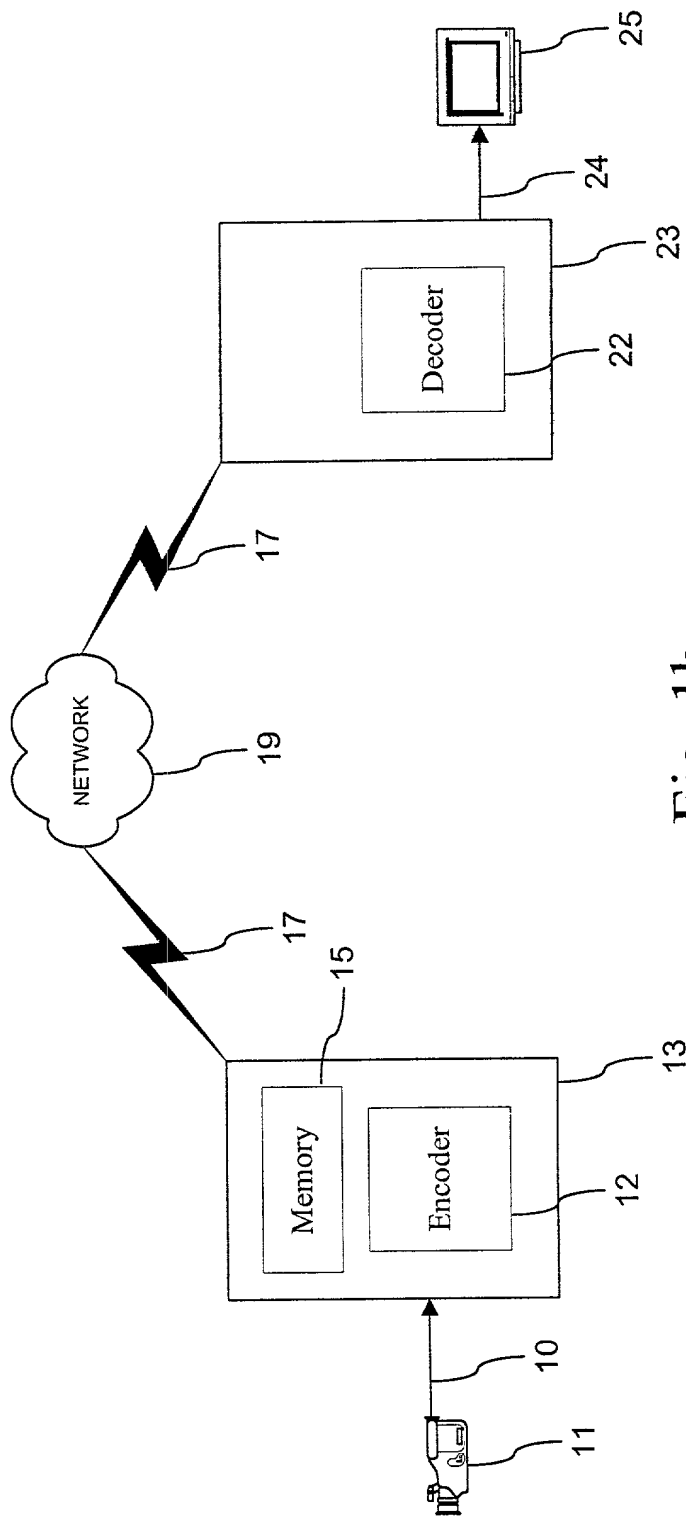


Fig. 1b




Fig. 2

# Horizontal Coefficients

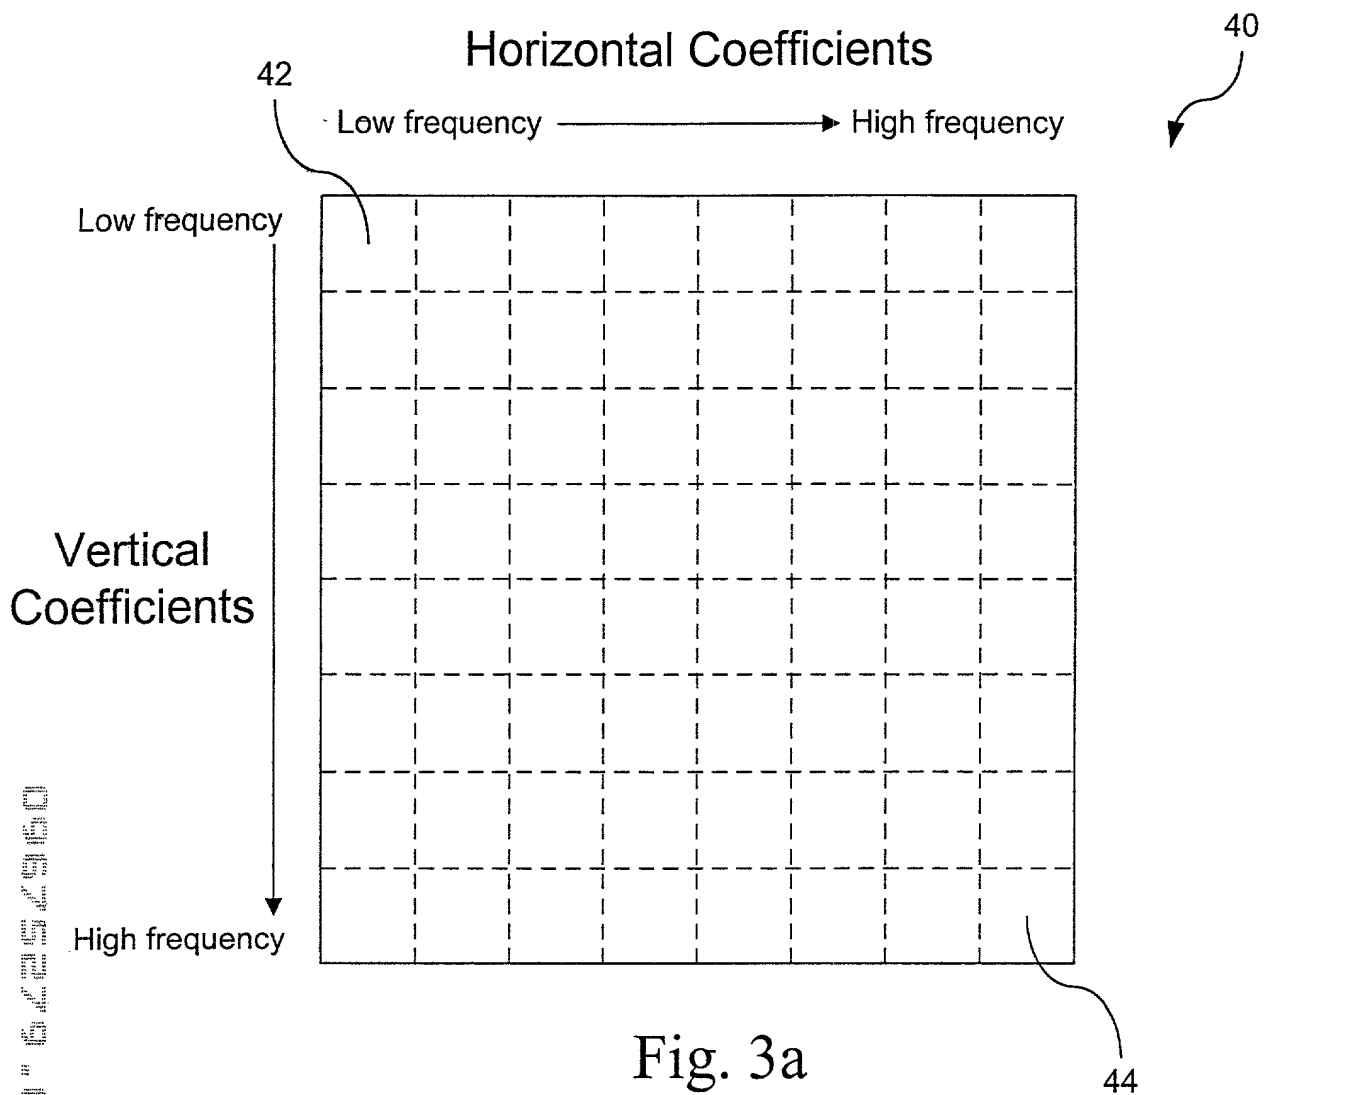


Fig. 3a

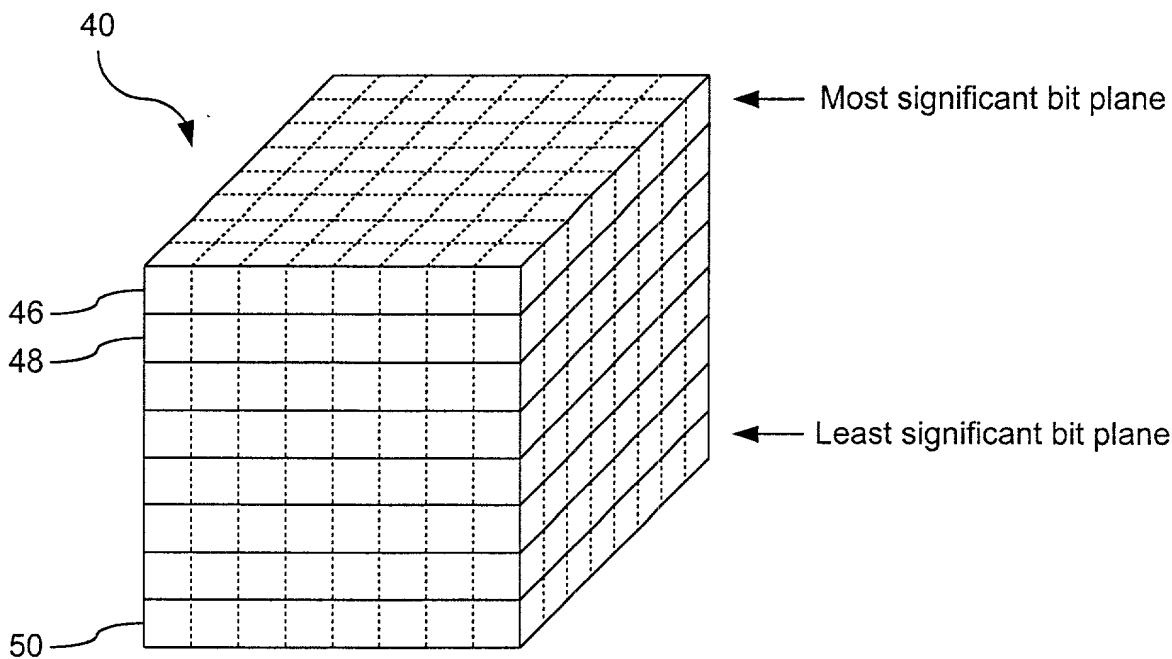


Fig. 3b

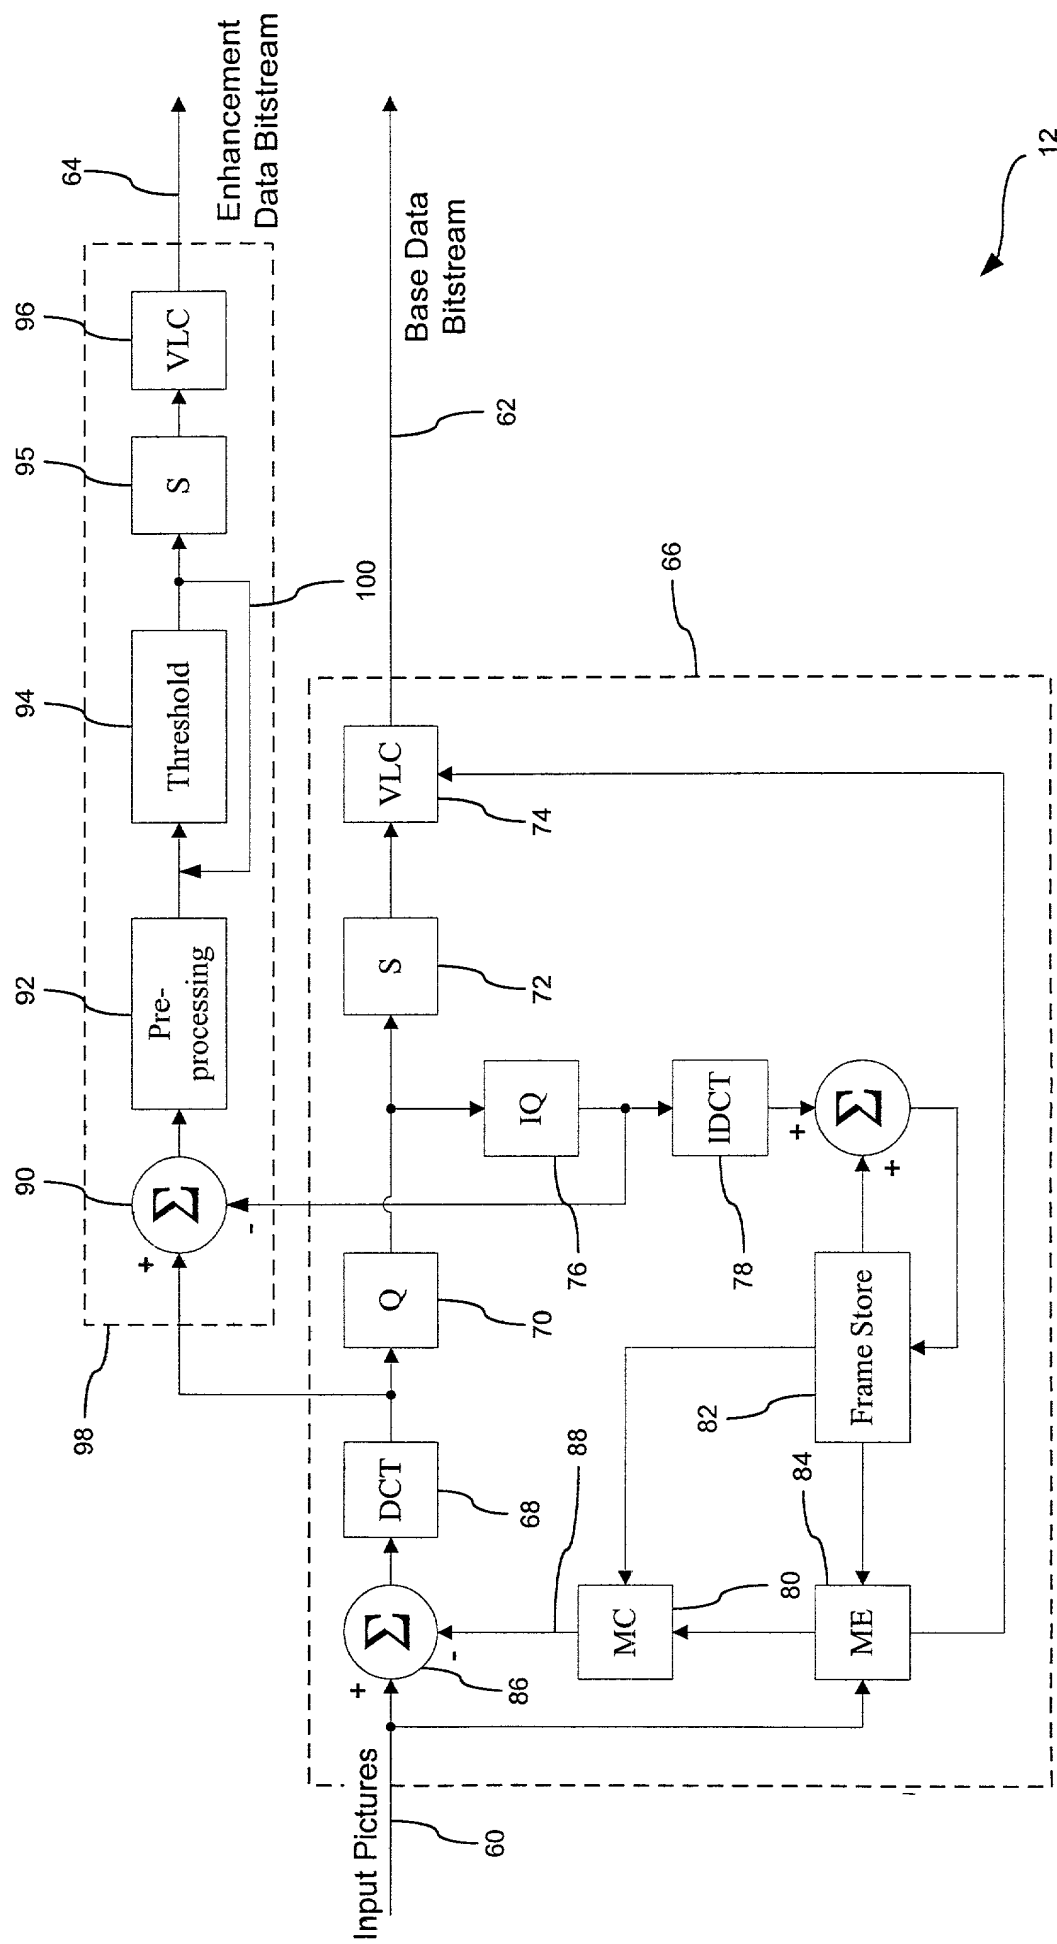


Fig. 4

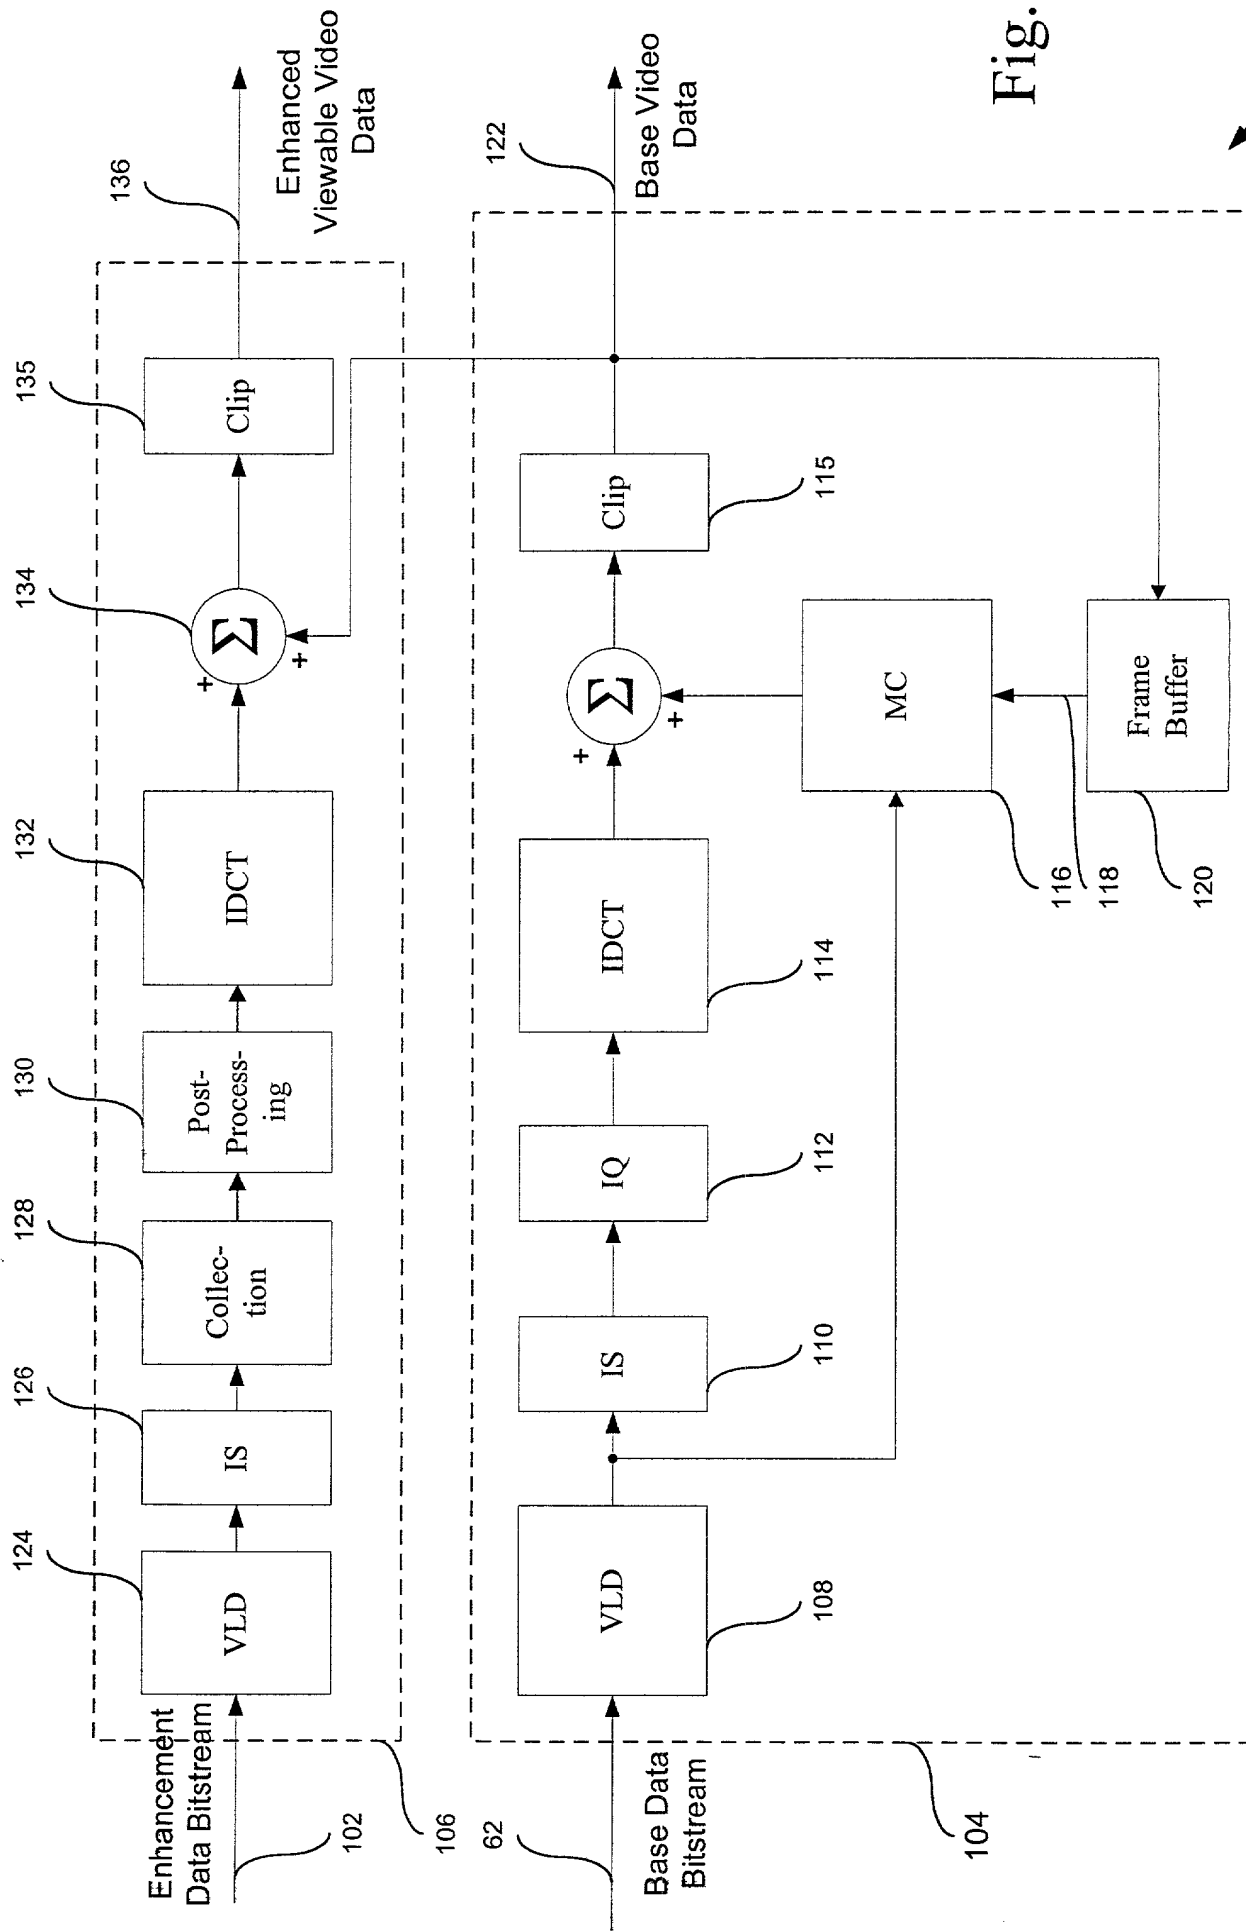


Fig. 5

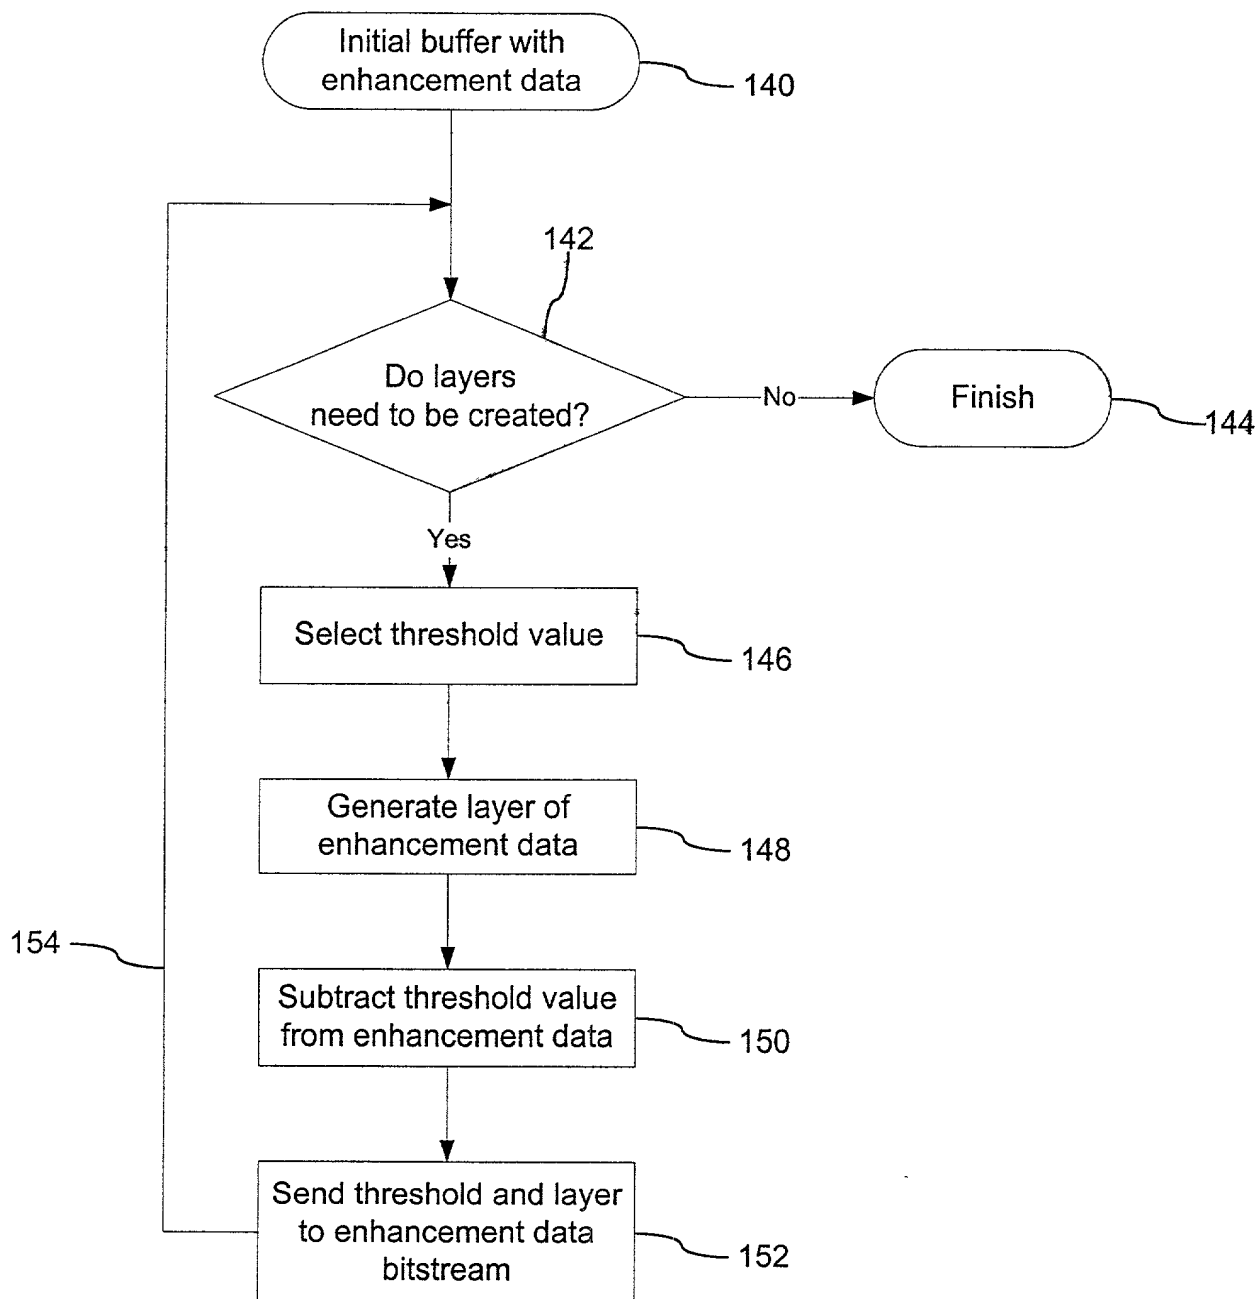


Fig. 6

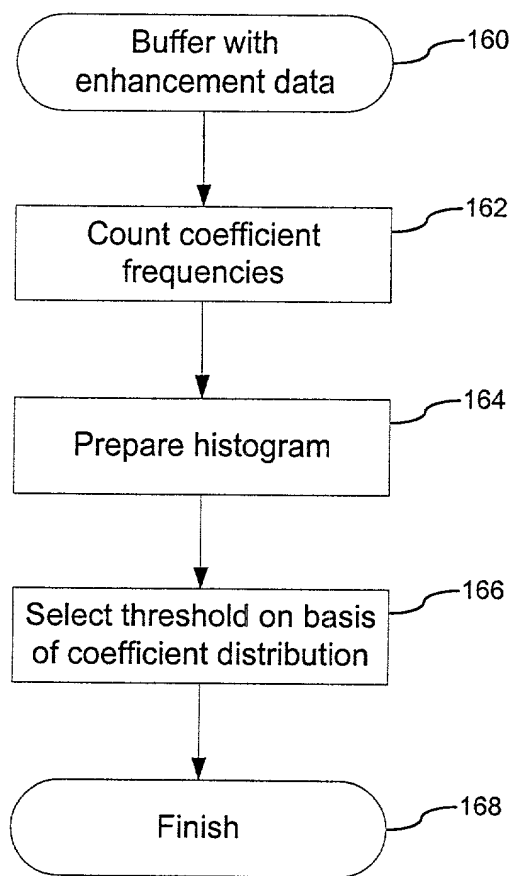


Fig. 7

